

# Performance Comparison of Dynamic OFDM with 802.11n

Date: 2007-11-14

## Authors:

<b>Name</b>	<b>Company</b>	<b>Address</b>	<b>Phone</b>	<b>email</b>
James Gross	Technical University Berlin	Einsteinufer 25 10587 Berlin, Germany	+49-30-314- 23830	gross@tkn.tu-berlin.de
Marc Emmelmann			+49-30-314- 24580	emmelmann@ieee.org
Oscar Puñal				
Adam Wolisz				awo@ieee.org

# Abstract

**Previous presentations about dynamic OFDM to the group raised the interest in a comparison to 802.11n. In this contribution we compare the performance of 802.11n in various different settings to dynamic OFDM, demonstrating a significant performance advantage for dynamic OFDM. We propose to include the consideration of dynamic OFDM as possible technological direction into the PAR.**


# Introduction

- **OFDM-based physical layers are commonly used for high-speed wireless networks**
- **Dynamic OFDM schemes can**
  - employ a sub-carrier-specific modulation according to each sub-carrier's channel gain and
  - exploit multi-user diversity
- **Previous presentations have elaborated these aspects and proposed a simple method to introduce dynamic OFDM in 802.11 systems [cf. 1-6]**
- **Group requested comparison with 11n → Focus of this presentation**

# Simulated Dynamic OFDM Schemes


- **Dynamic Single-User OFDM [1,4-6]**

--> different modulation  
per sub-carrier according  
to sub-carrier channel gain

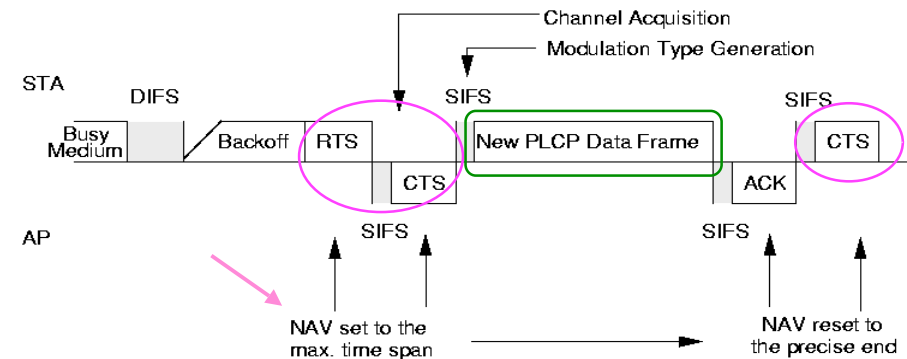

- **Dynamic Multi-User OFDM [2]**

--> additionally exploit  
multi-user diversity

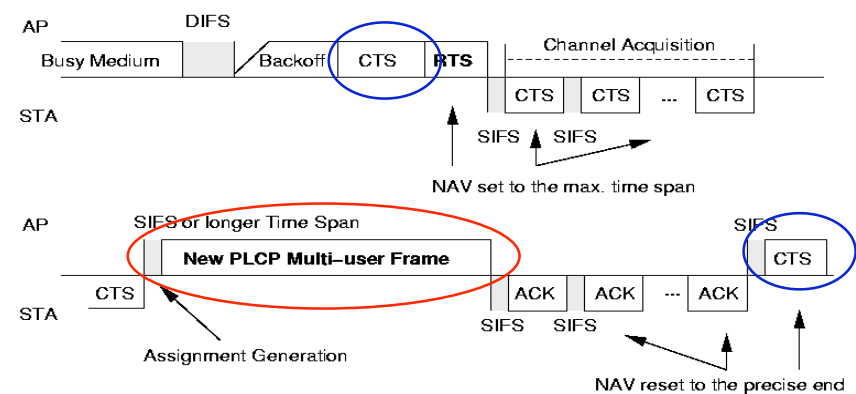


→ Protocol overhead to include  
Dynamic OFDM considered  
in simulation results

# 802.11n & Channel Model

- **Simulations for 11n considering**
  - A-MPDUs Frame Aggregation [10]
  - 2x2x20 MHz Spatial Multiplexing with MMSE receiver [10]
  - Channel Model E (Large Office) [8,9]
  - Convolutional coding
  
- **Sub-Carrier Specific Attenuation**
  - MatLab used to generate impulse response of channel for each transmission [8,11]
  - Impulse response used to calculate channel matrix H  
--> sub-carrier specific attenuation

# Verification of Simulator

- **PERs for 11n (2x2x20MHz, channel E, 1000 Byte PDU)**
  - as presented in 11-06/0067r3 TGN Joint Proposal Phy Results
  - as obtained with our simulator


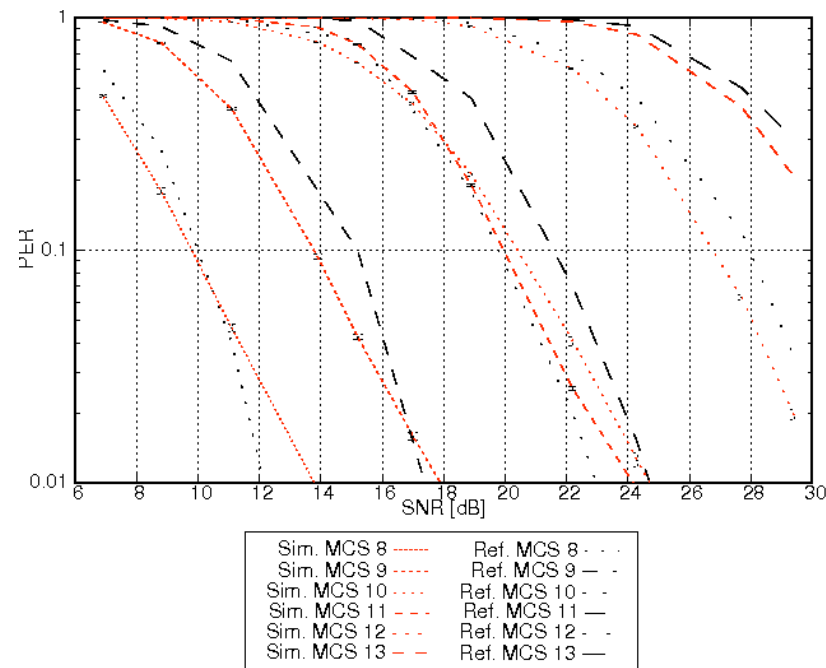


## Simulation Details

- **Large PDUs (1536 Byte) & small ones (200 Byte)**
- **Saturation mode (always “enough” packets in queue)**
- **P2P scenario: one transmitter, one receiver, no further stations, one-way traffic only**
- **P2MP scenario: one transmitter, several (4) receivers, no further stations, one-way traffic only, all receivers at same distance to transmitter**
- **Performance metric: MAC Goodput [bit/s]**

# Results I – Baseline

- 1 spatial stream, no frame aggr., P2P scenario

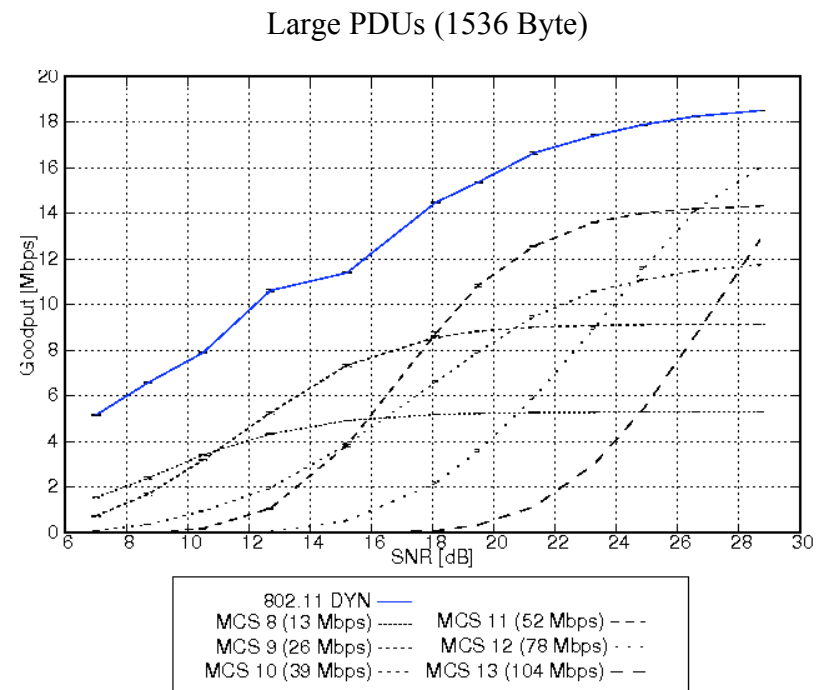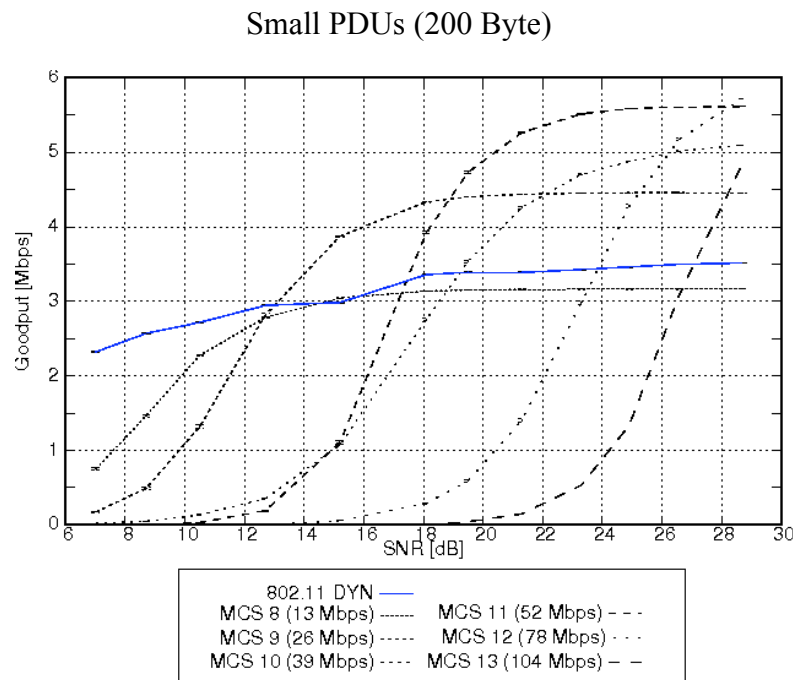





## Results II – Reduction of MAC Overhead

- 1 SS, **frame aggr. activated**, P2P scenario

Small PDUs (200 Byte) – FA with 4 PDUs


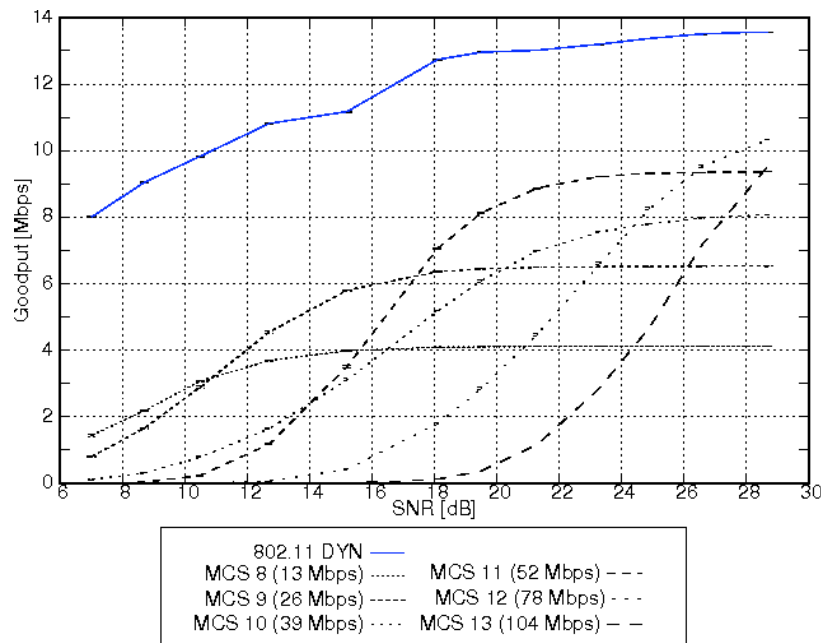


Large PDUs (1536 Byte) – FA with 2 PDUs

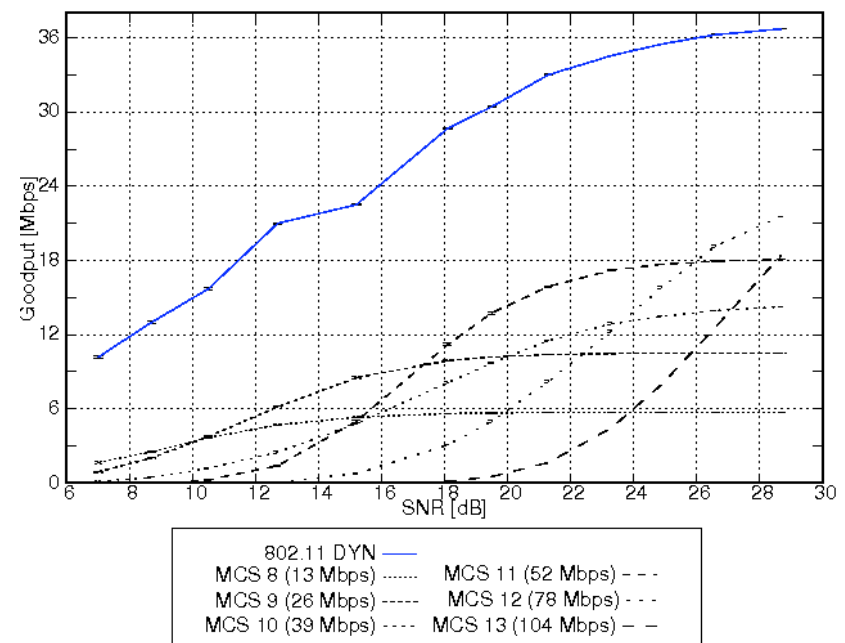

## Results III – Adding Multi-user Diversity


- 1 SS, frame aggr. activated, **P2MP (4 STA) scenario**
- Equal PDU number aggregated into one channel access

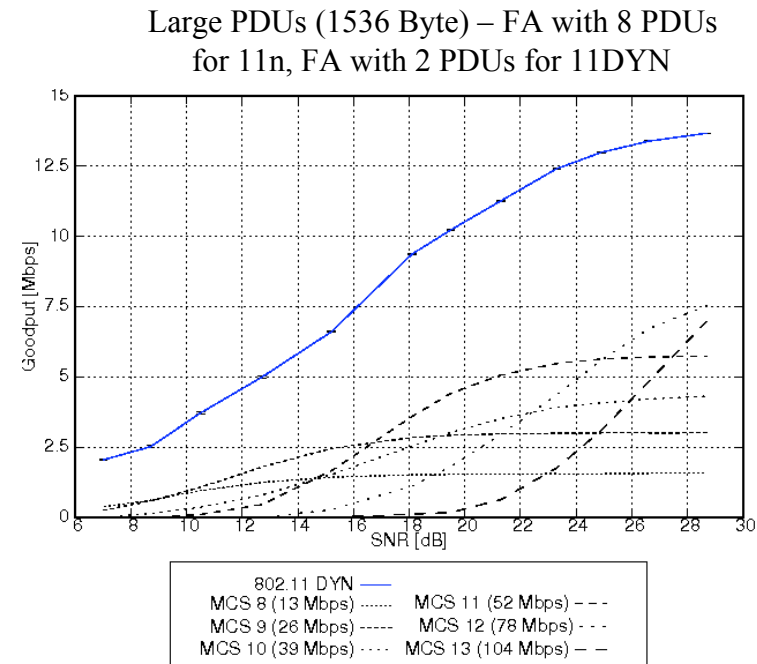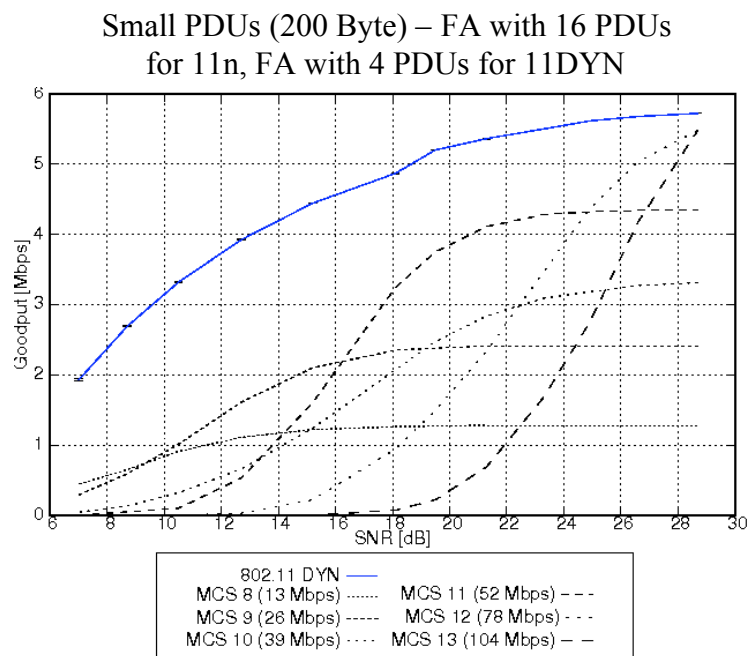


# Results IV – Adding Spatial Layers

- **2 SS, frame aggr. active, P2MP scenario (4 STA)**

Small PDUs (200 Byte) – FA with 16 PDUs for 11n, FA with 2 PDUs for 11DYN

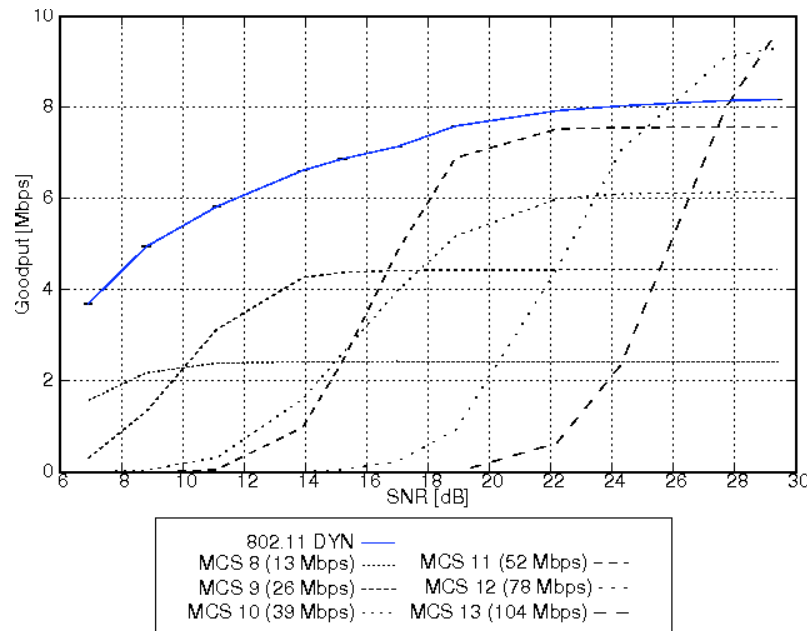

Large PDUs (1536 Byte) – FA with 8 PDUs for 11n, FA with 2 PDUs for 11DYN

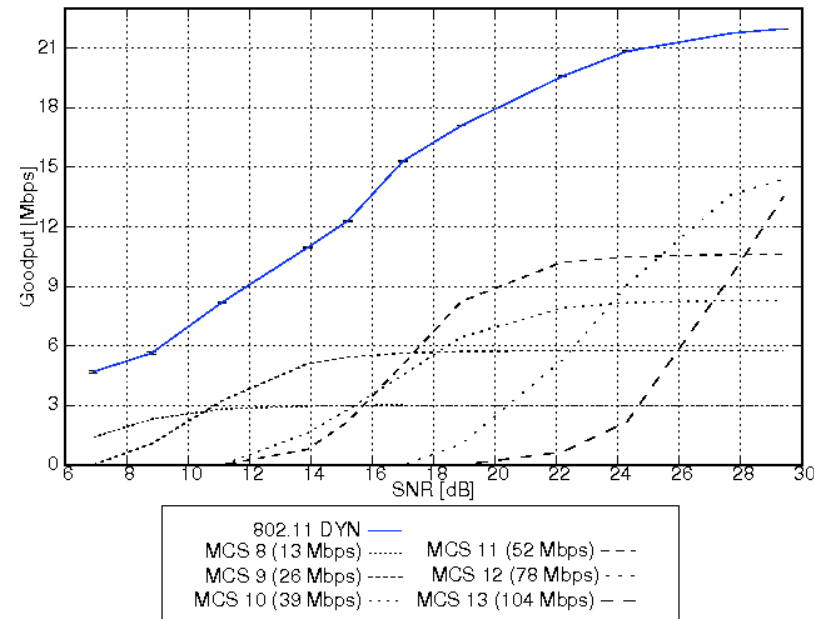

**Note: In all presented comparisons 802.11 DYN is applied to 48 (96) data subcarriers whereas 802.11n results are based on 52 (104) data subcarriers**

## Summary and PAR Recommendations

- **Even a simple approach to enhance 802.11 with dynamic OFDM (and hence include multi-user diversity) can outperform 11n**
- **Future work: Comparison to beamforming MIMO modes**
- We do not propose specific protocol means to include dynamic OFDM; but we strongly believe that
- **The PAR should consider**

dynamic (MIMO-)OFDM schemes **to** exploit multi-user diversity

**and**

sub-carrier specific modulation schemes

# References

- [1] 11-07/0720r2 -- Dynamic Point-to-Point OFDM Adaptation for IEEE 802.11a/g Systems
- [2] 11-07/2062r1 -- Dynamic Multi-user OFDM for 802.11 systems
- [3] 11-07/2187r1 -- Another resource to exploit: multi-user diversity
- [4] J. Gross, M. Emmelmann, O. Puñal, and A. Wolisz, "Dynamic Point-to-Point OFDM Adaptation for IEEE 802.11 Systems," accepted for publication at IEEE/ACM International Symposium on Modeling, Analysis and Simulation of Wireless and Mobile Systems (MSWiM), October 2007.
- [5] J. Gross, M. Emmelmann, O. Puñal, and A. Wolisz: 802.11 DYN: Protocol Extension for the Application of Dynamic OFDM(A) Schemes in 802.11a/g Systems, Technical Report TKN-07-002, Telecommunication Networks Group, Technische Universitaet Berlin, May 2007.
- [6] J. Gross, M. Emmelmann, O. Puñal, and A. Wolisz: Dynamic Point-to-Point OFDMA Adaptation for IEEE 802.11a/g Systems, doc. 11-07/720, IEEE 802.11 WNG SC Wireless Next Generation Standing Committee, Montreal, Canada, May 14 -- 18 2007.
- [7] 11-06/0067r3 -- TGn Joint Proposal Phy Results
- [8] 11-03/940r4 -- TGn Channel Models
- [9] 11-03/802r23 -- Usage Models
- [10] TGn Draft most recent version
- [11] L. Schumacher "WLAN MIMO Channel Matlab program," download information: [www.info.fundp-ac-be/~lsc/Research/IEEE\\_80211\\_HTSG\\_CMSC/distribution\\_term.html](http://www.info.fundp-ac-be/~lsc/Research/IEEE_80211_HTSG_CMSC/distribution_term.html)